

DEYES

The Deyes recessed LED panel is constructed with a special grille design that keeps glare and discomfort to a minimum. It is both UGR13 and boasts a high lumen output of 115lm per watt. The Deyes will directly replace T5 and T8 fluorescent luminaires and is an ideal solution for offices, schools and other commercial applications. Available in 3-hour Emergency option.


UGR
13

ENERGY
EFFICIENT

115
LM/W




- Constructed from steel & clear polycarbonate
- Matt white finish
- PF>0.9
- Emergency battery warranty 2 years (replaceable)



CODE	DESCRIPTION	LAMP	K	LM	LM/W	DIMENSIONS
78547	Deyes 30W	30W LED module (SMD)	4000	3450	115	Sq: 595mm H: 20mm
80086	Deyes EM	30W LED module (SMD)	4000	3450	115	Sq: 595mm H: 20mm

KINGSLEY

The Kingsley can operate as a single lighting unit or in a seamless run of continuous, energy efficient lighting conjoined. For a straight run it can be connected easily using the straight connector included or create angles using the angle accessory. It is a seemingly simple architectural profile luminaire, forming a thin line of continuous light popular with architects and designers. The Kingsley is the ultimate performance driven slim linear profile. Thanks to its superb build quality, excellent performance.

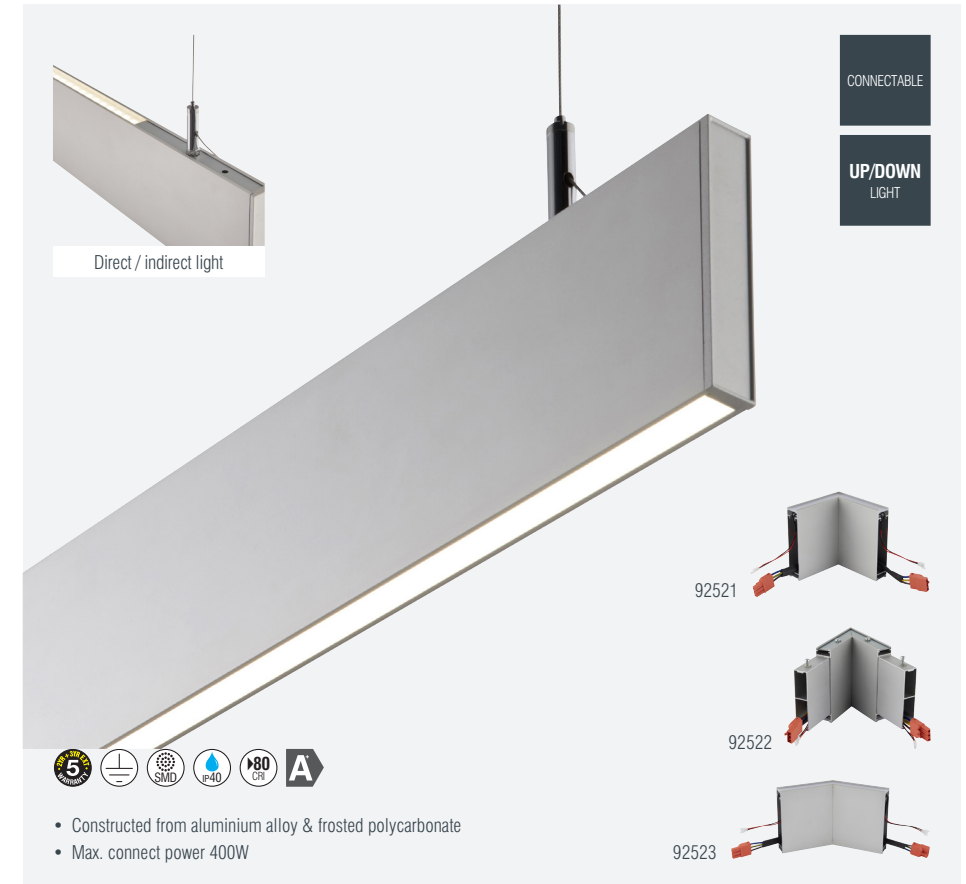

CODE	DESCRIPTION	FINISH	K	LM	LM/W	DIMENSIONS
78978	Kingsley 40W	Silver anodised	4000	3600	90	H: 94.2-1500mm W: 20mm L: 1498mm
92520	Kingsley 35WW		4000	2000	80	H: 94.2-1500mm W: 20mm L: 1498mm
92521	NEW 90 Degrees Corner			350	117	H: 94.2mm W: 138mm L: 138mm
92522	NEW 60 Degrees Corner			350	117	H: 94.2mm W: 138mm L: 138mm
92523	NEW 135 Degrees Corner			350	117	H: 94.2mm W: 138mm L: 138mm