

STRATUS CCT

The Stratus range of backlit LED panels offers superior light distribution and proven reliability. White painted steel body, backlit LED module with high efficiency optical design and opal diffuser suitable for use in 15 or 24mm standard exposed grid ceilings. The Stratus Pro comes complete with our new innovative fast-fix loop-in loop-out integrated driver saving valuable time on installation. Range of accessories available, see page 59.

NEW
PRODUCT

CCT
3000K/4000K
/6000K

TPB

IP44
RATED


FAST
FIX

- Backlit panel
- Constructed from aluminium alloy, steel & polystyrene
- 40W LED module (SMD)
- White finish
- Emergency LED conversion kits available (92514 & 91944), see page 280-281

CODE	DESCRIPTION	WATT	K	LM	LM/W	DIMENSIONS
92543	Stratus CCT IP44	40W	3000 / 4000 / 6000	4000	100	Sq: 595mm H: 30mm
81007	Triac dimmable driver	40W				
92246	Dali dimmable driver	40W				

STRATUS ACCESSORIES

Adjustable suspension, surface mount and recessed kits for use with our Stratus ceiling panels. Designed for environments that do not have a T-Bar ceiling, but can still benefit from the Stratus's excellent low maintenance and running costs. 4 steel cables or clips required for 595 x 595mm panels and 6 steel cables or clips required for 1195mm panels.

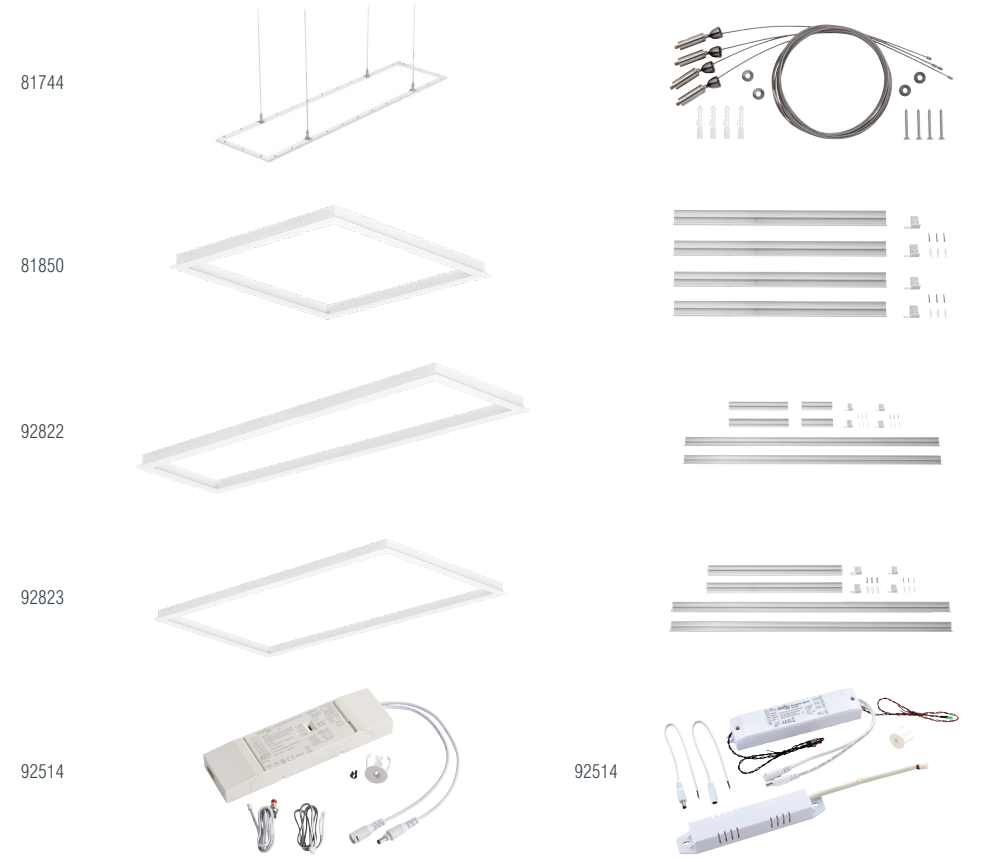

CODE	DESCRIPTION	SPECIFICATION	DIMENSIONS
81744	Stratus Suspension Kit (4 cables)	Bright zinc	L: 200-1000mm
81850	Surface Mount Kit (for 595 x 595mm)	Gloss white	Sq: 600mm H: 58mm
92822	Surface Mount Kit (for 1195 x 595mm)	Gloss white	
92823	Surface Mount Kit (for 1195 x 595mm)	Gloss white	
91237	Recess Clip Kit (14 clips)		
92514	NEW Emergency LED conversion kit		
91944	NEW Emergency LED conversion kit - Self Test		