
Stratus Surface Mount Kit

92822, 92823



Thank you for purchasing this accessory. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

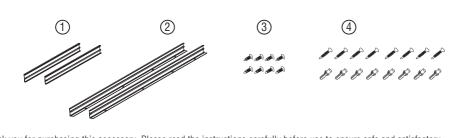

Installation

These surface mount kit are designed only for use with Stratus Panel lights.

- 92822 surface mount kit is suitable for 92275, 92276 & 92277 Stratus Panel lights.

- 92823 surface mount kit is suitable for 92542 Stratus Panel light.


Please refer to the installation instructions supplied with the fitting for wiring and connection details.

Note that the switch is turned off before installation.

The ceiling surface must be flat and smooth to ensure a good fit.

Check you have all necessary prts:

- 8 x plastic plugs 8 x screws (short) ()
- 8 x screws (long) (minimum 4 x mounting frame pieces
- Lay out the 4 sides and clip the frame together. It is advised that the 4th side is only partially installed to ensure it is square while being fixed to the ceiling. Please note the ceiling fixing holes on the Left & Right frame sections should be on opposite sides. (See Fig.1).
- 2. Using the part-assembled frame as a template, mark and drill the fixing holes. Take care not to damage any concealed wiring or pipes.
- 3. Referring to Fig. 2, fix the part-assembled frame to ceiling using the supplied plastic plugs and long screws.
- Referring to Fig.3, connect the driver as per the instruction manual supplied with the Stratus Panels and carefully slide the panel into the 3 sided frame.
- 5. Fix the fourth frame piece (without fixing holes) in place. Secure it to 2 mounting frames use supplied short screws (See Fig. 4).
- 6. Replace fuse or circuit breaker and switch on. Your light is now ready for use (See Fig. 5).

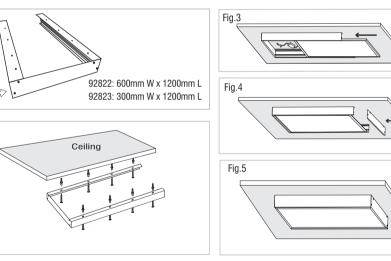

Recycling advice



Fig.1

Fig.2

Conformity with all relevant EC Directive requirements.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or local store for recycling advice.

Safety information

For your safety, always switch off the power supply before cleaning.